
SERVICE BULLETIN # 1011


SUBJECT Plunge Bow Operation

MODEL **Attachments** DATE 2-4-58

The plunge bow assembly is designed to provide greater ease in bucking and limbing operations without the need for continuous bending or awkward cutting positions on the part of the operator. With the narrow track, the possibility of restrictive pinching is almost completely eliminated.

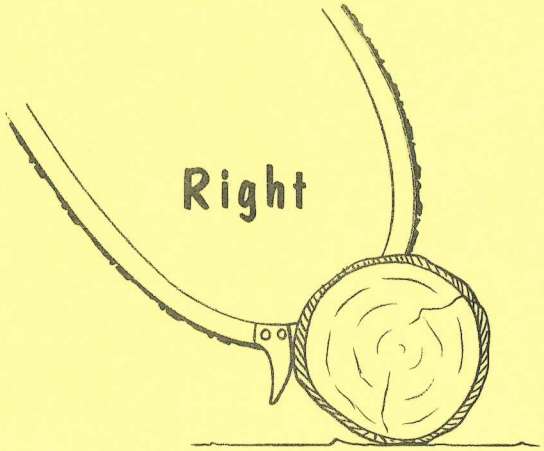

The curved and pointed pair of bucking spikes, attached on the lower end of the bow's leading edge, serve as a stopping block to guide the log against the cutting chain.

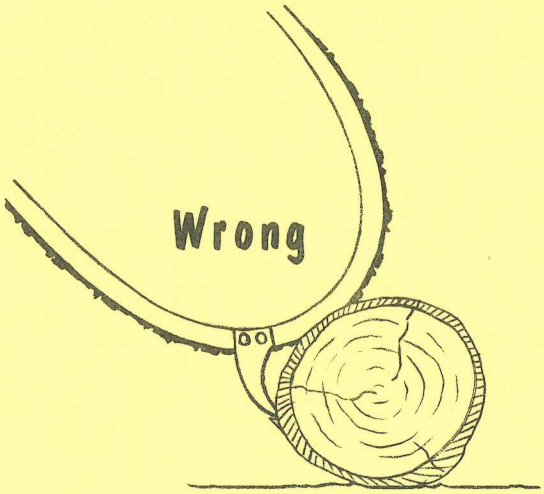

It is important that the bucking spikes be installed so that their concave or hollowed out side is turned towards the engine. If the concave side of the spike is turned towards the log, the point will impede rather than assist the movement of the log against the chain, with a tendency to dig into the log.

LITHO IN U.S.A.