
SERVICE BULLETIN # 1013

SUBJECT Installation of McCulloch Sprocket, Drum and Bearing Assemblies.

MODEL Competitive Saws DATE 2-18-58

The owner of a Homelite Chain Saw can take advantage of the special features offered in McCulloch Pintail Saw Chain by using the correct McCulloch Sprocket, Drum and Bearing Assembly. McCulloch Sprocket, Drum and Bearing Assemblies are interchangeable with Homelite Assemblies on the Homelite EZ Saw, when a special McCulloch Spacer is also used.

Since the McCulloch sprocket is slightly wider than the Homelite sprocket, the special spacer(1), part number 52591, is used to provide clearance between the Homelite outer thrust washer (2) and the McCulloch sprocket (3). The accompanying sketch illustrates the installation of the McCulloch Sprocket, Drum and Bearing Assembly (4) and the use of the special spacer.

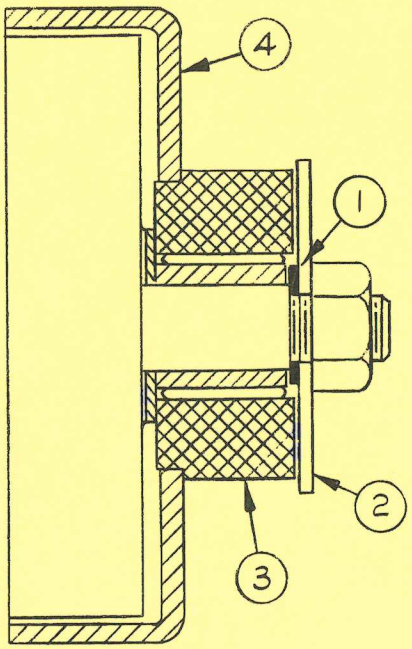

NOTE: If a McCulloch Sprocket and Drum Assembly, without a bearing, is to be used, the needle bearing can be removed from the Homelite assembly and installed in the McCulloch Sprocket.

LITHO IN U.S.A.