
McCULLOCH

SERVICE BULLETIN # 1042

MODEL **MAC D30** and D36 DATE 12/3/58


SUBJECT **REMOVING CARBURETOR MOUNTING BOLTS**

Use a thin, 7/16" open end wrench with 45° and 90° angles to get at those hard-to-reach carburetor mounting bolts.

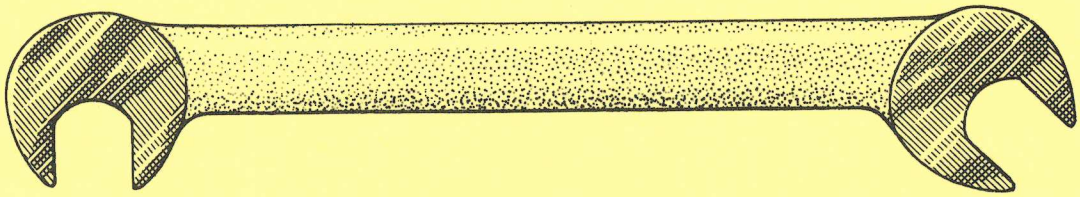

Thin, open end wrenches of this type can be purchased at most automotive and garage supply stores, mail order houses and hardware stores.

Two wrenches are a GOOD investment.

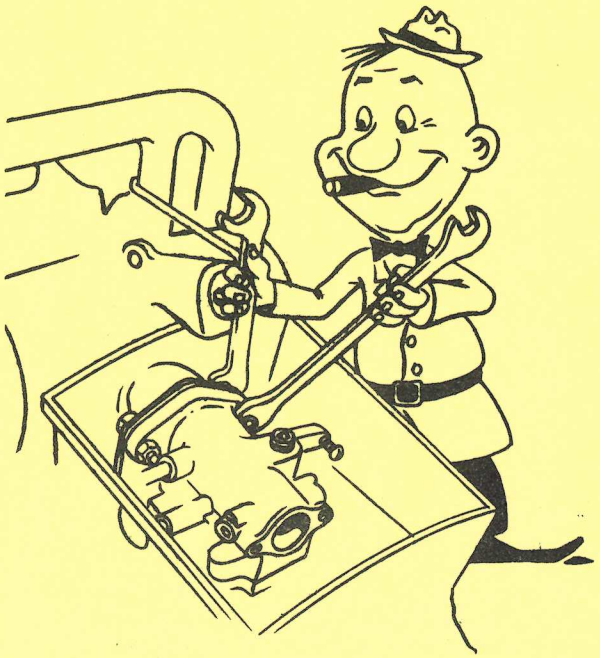

© 1958 McCULLOCH CORPORATION

LITHO IN U.S.A.