
McCULLOCH

SERVICE BULLETIN # 1096

SUBJECT CLUTCH RETAINING NUT

MODEL MISCELLANEOUS DATE 5/27/60

When installing the clutch retaining Flexloc Nut, P/N 103746, on the crankshaft, always tighten the nut to 25 foot-pounds (240-300 inch/pounds) torque. This will prevent the clutch from loosening and destroying the crankshaft, key, and clutch rotor.

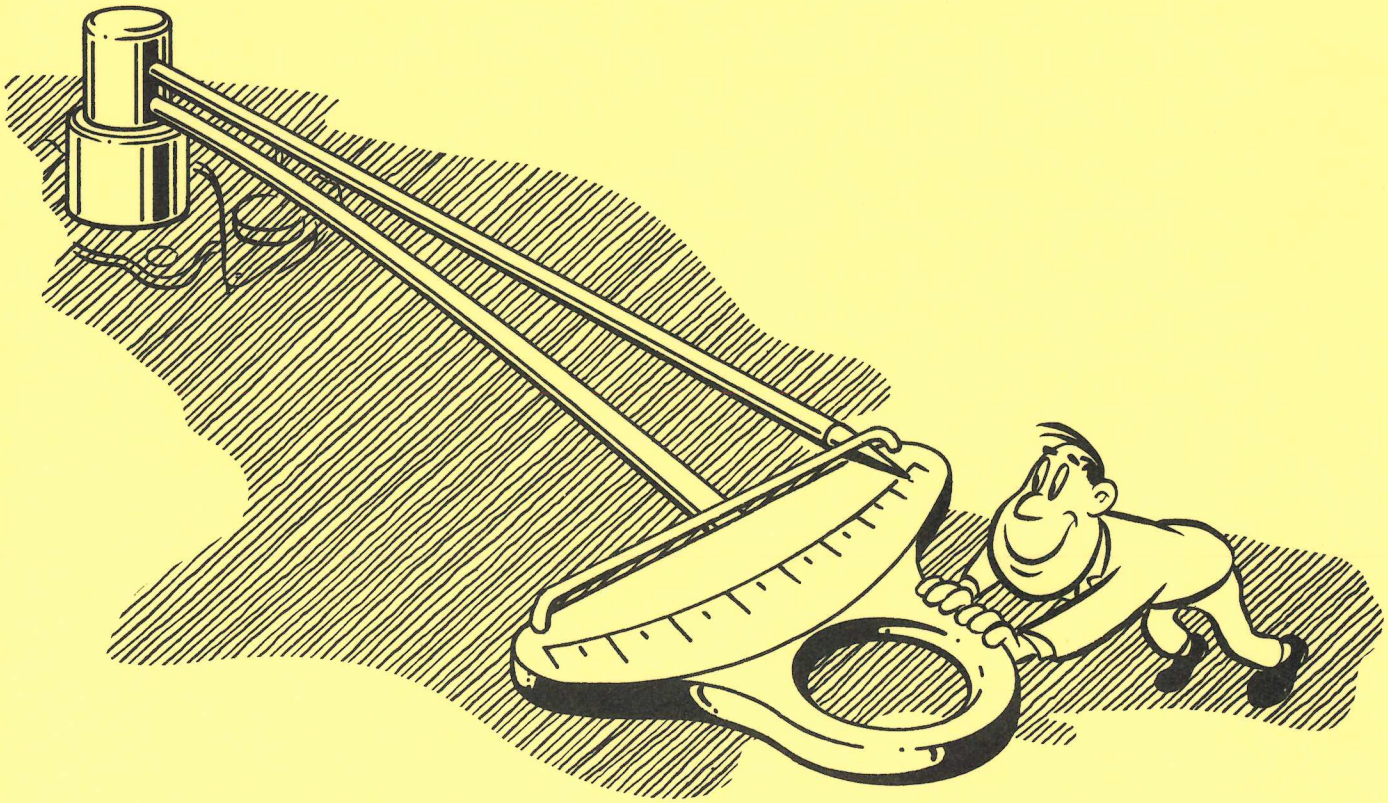

COPYRIGHT 1960 McCULLOCH CORPORATION

LITHO IN U.S.A.