McCULLOCH CORPORATION
SERVICE BULLETIN

1481

MODEL: 940 October 17, 1969


SUBJECT: FIXED HIGH SPEED JET CARBURETOR

Carburetors used on Model 940 saws with serial numbers prefixed 11- have a fixed high speed jet. The standard jet supplied with the carburetor has an orifice of 0.041 inch diameter.

Alternate jets of 0.043, 0.039 and 0.037 inch diameters are available. Use the next smaller orifice if the high speed fuel mixture is too rich. Use the next larger orifice if the high speed fuel mixture is too lean.

Ordinarily the 0.041 and 0.039 inch orifices will cover the general broad range of cutting conditions. Do not use the 0.037 inch orifice below 4000 feet altitude. Use the 0.043 inch orifice only if an extremely rich mixture is desired.

Part No.	Description
84057	Jet - Main fuel 0.043 orifice
84035	Jet - Main fuel 0.041 orifice
84058	Jet - Main fuel 0.039 orifice
84059	Jet - Main fuel 0.037 orifice

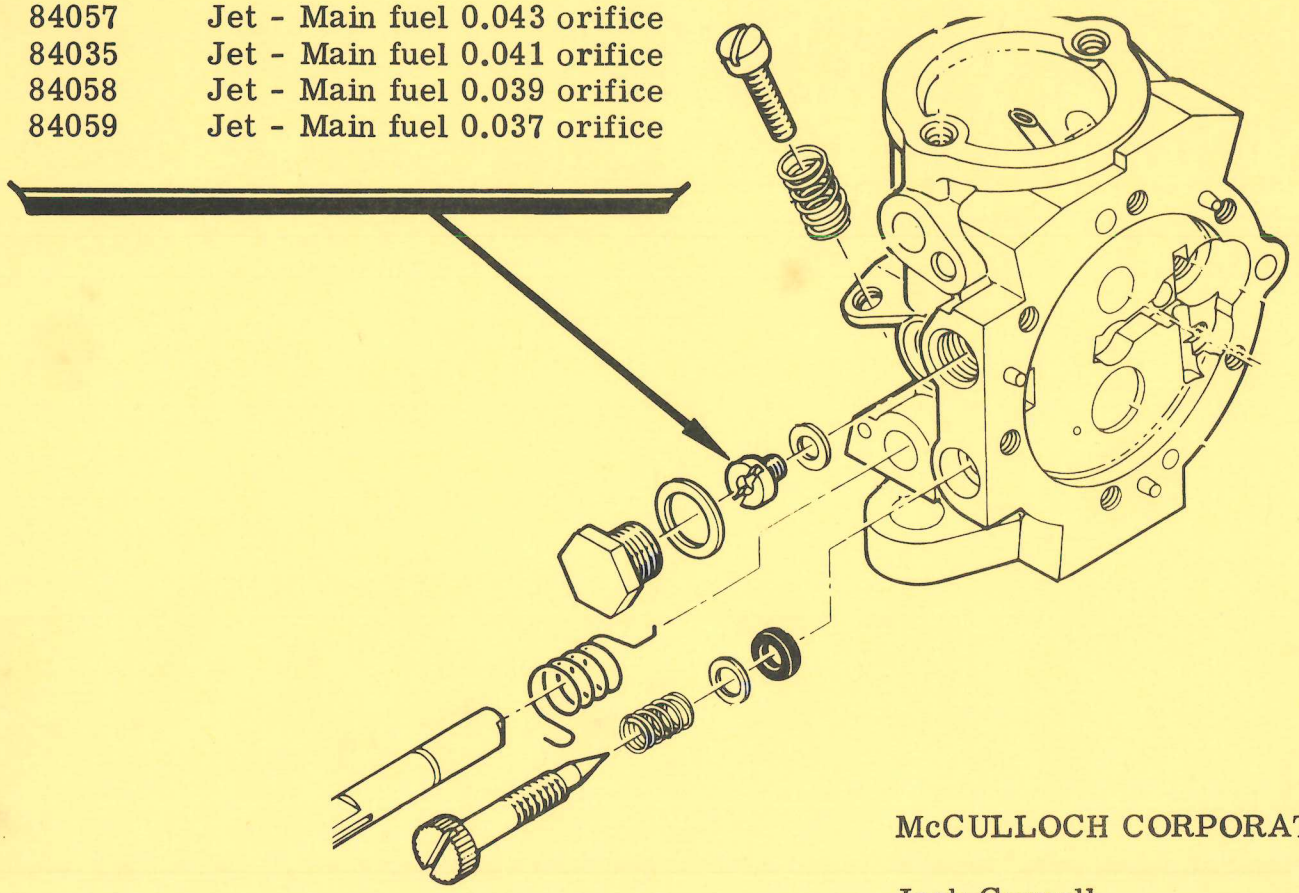

McCULLOCH CORPORATION

Jack Carroll
Service Manager

Copyright 1969 by McCulloch Corporation

LITHO IN U.S.A.