McCULLOCH CORPORATION
SERVICE BULLETIN


1538

MODEL: All

SUBJECT: Silastic 732 RTV April 18, 1973

A new sealant, Silastic 732 RTV, P/N ~~11083~~ 110083, is now available for use in crankcase sealing. Silastic 732 RTV cures to form a strong but easily removed silicone rubber seal.

Apply Silastic 732 RTV lightly in small beads on one of the surfaces to be sealed and the opposite bearing bore. Press the surfaces together and allow to cure for 1/2 hour after assembly.

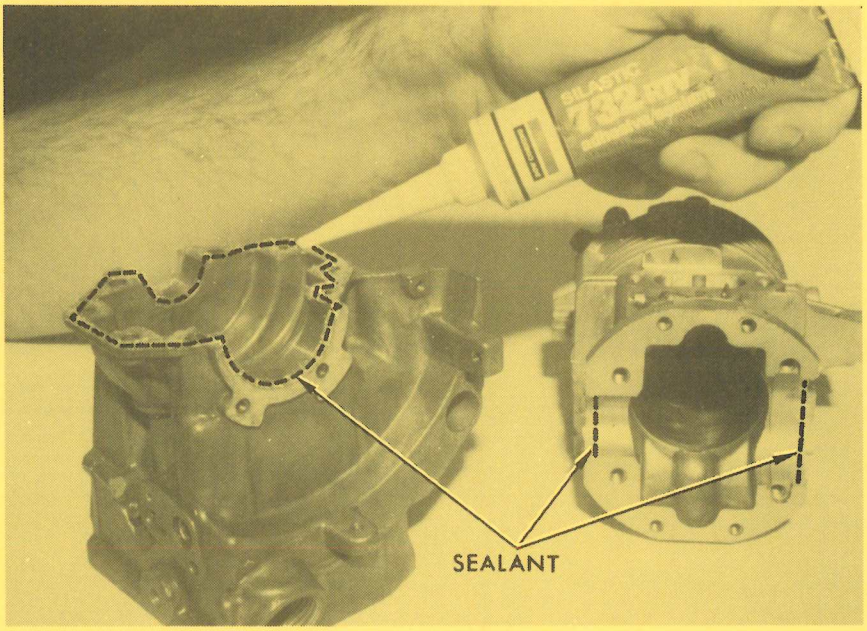

Silastic 732 RTV is available in a 3 oz. tube, with applicator tip, at a Manufacturer's Suggested List Price of $2.00.

McCULLOCH CORPORATION

By Jack Carroll
Service Manager

Copyright 1973 by McCulloch Corporation

LITHO IN U.S.A.