McCULLOCH CORPORATION
SERVICE BULLETIN

1557

MODEL: Mini-Mac 1, 1A, 6, 6A, 30, & 35

April 26, 1974

SUBJECT: Use of Oil Plate, PN 90654

Bars for the above-listed models have been improved over earlier bars in that the tails have been shortened slightly to make it easier and faster to install chains. The bars in Table 1 are now being produced for these saws.

Table 1. Mini-Mac Bars

Hard-Nose Bars	
10-in.	PN 90630
12-in.	PN 90631
14-in.	PN 90632
Sprocket-Nose Bar	
14-in.	PN 90550

When bars in Table 1 are used on any Mini-Mac 1, 1A, 6, or 6A, or early models of the Mini-Mac 30 or 35 (which have a long oil trough shown in Figure 1), Oil Plate, PN 90654, must be used to prevent oil escape from the rear of the oil trough when the bar is moved out to its maximum adjustment. To ensure proper chain and bar lubrication, put the oil plate between the bar pad and the bar, as shown in Figure 2.

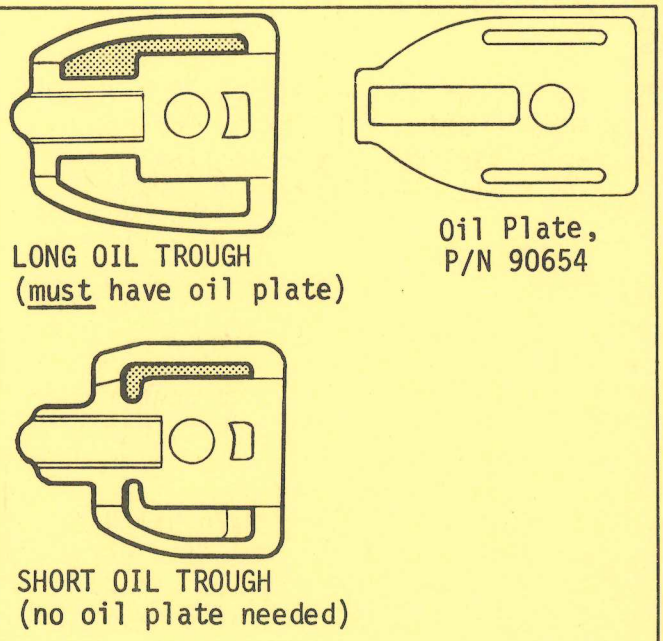


Figure 1. Long and Short Oil Troughs (Shaded Areas) in Bar Pads.

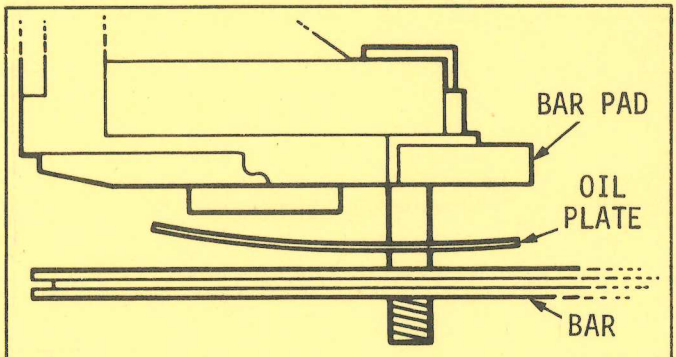


Figure 2. Top View of Bowed-Out (Convex) Side of Oil Plate Next to Bar.

McCULLOCH CORPORATION

By Jack Carroll
Director, Product Service

Copyright 1974 by McCulloch Corporation

LITHO IN U.S.A.