McCULLOCH CORPORATION
SERVICE BULLETIN

1560

MODEL: Mini-Mac 30, 35


May 16, 1974

SUBJECT: NEW THROTTLE ROD CLIP

A small Clip, P/N 90955, is now being installed in the throttle Trigger, P/N 83878, to prevent the possibility of throttle rod from slipping out of the trigger hook. The trigger is drilled to accept the clip.

The clip and the drilled trigger were first used on Mini-Mac saws as follows:

Mini-Mac 30 (Model 600093U) beginning with serial number 67758
Mini-Mac 35 (Model 600091U) beginning with serial number 52501
Mini-Mac 35 (Model 600091H) beginning with serial number 15001

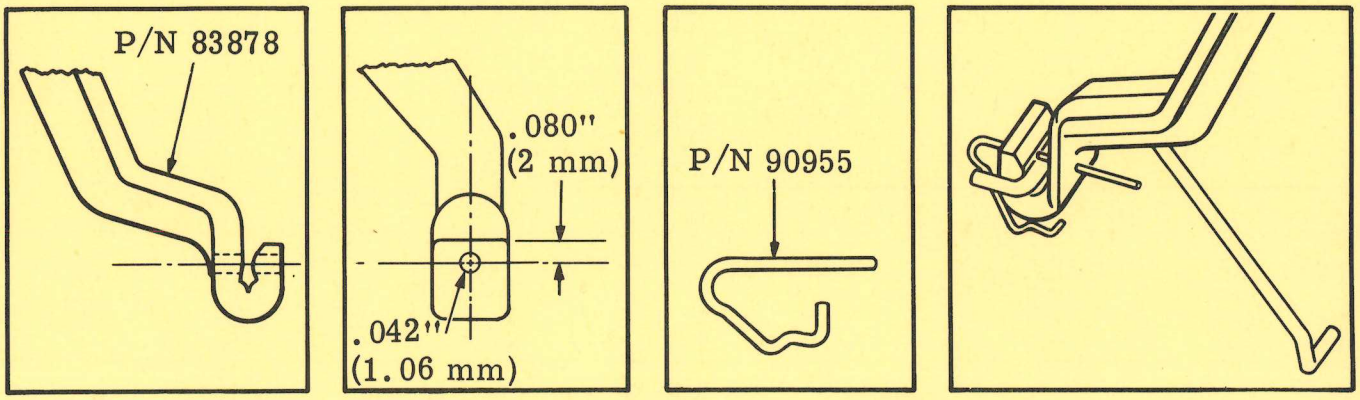

Installation

1. Snap the throttle rod into the trigger hook in the usual way.

2. Holding the clip with a pair of needle nose pliers, push the straight end of the clip into the drilled hole until the curved end of the clip slides under the curve at the bottom of the trigger hook.

Drilling the trigger

Any trigger may be drilled to permit installation of the clip.

1. Remove the trigger from the saw.

2. Drill a .042 inch hole (1.06 mm) through both walls of the trigger hook as illustrated. (Drill the hole approximately .080 inch (2 mm) below the outer lip).

McCULLOCH CORPORATION

By Jack Carroll
Director, Product Service

Copyright 1974 by McCulloch Corporation

LITHO IN U.S.A.