McCULLOCH SERVICE BULLETIN

NO. 1590

MODEL MINI MAC. DATE August 19, 1975

SUBJECT 1. Vented Fuel Tank, and Un-Vented Fuel Caps.

2. Vented Cap for Backfit.

1 MINI-MAC - Vented Fuel-Oil Tank Assembly Kit (With Un-Vented Caps).

The Mini-Mac Series Saws are now being manufactured with a vented fuel tank and unvented fuel cap.

Service replacement vented Fuel and Oil Tank Assembly Kit, P/N 91454, includes - in addition to the tank assembly itself - two unvented Fuel Tank Caps, P/N 91283, and one Fuel Vent Protector ("Seal"), P/N 91148.

The new vented tank assembly has a vent hole just to one side of the fuel filler neck. For easy identification of this vented tank, the front of the tank has a blue dot near the fuel filler neck. The felt protector is designed to keep the vent from being plugged.

Figure 1 is of the vented fuel and oil tank assembly. Figure 2 shows a comparison of the vented (A) and unvented (B) fuel caps, together with the fuel vent protector (C).

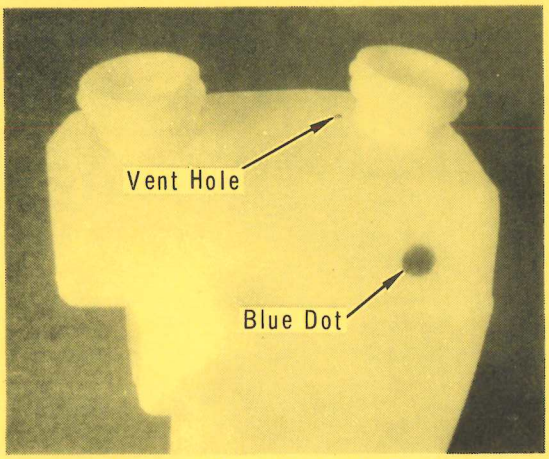


Figure 1. Vented Tank.

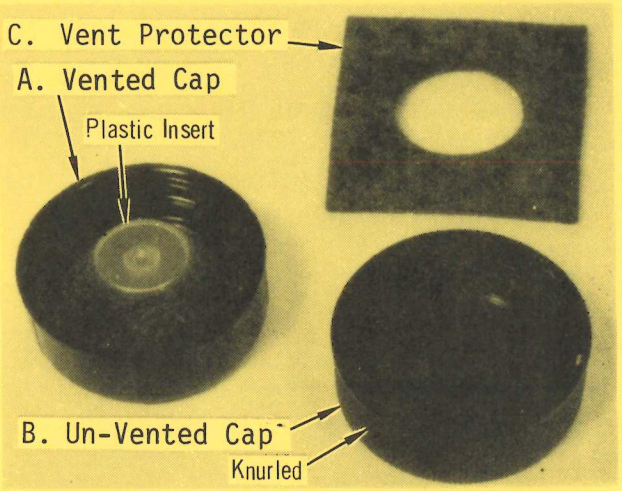


Figure 2. Fuel Tank Caps Compared, Together With Vent Protector.

The following are nominal model and serial numbers of the first production saws to be fitted with the new vented fuel tank.

MODEL	MODEL NUMBER	SERIAL NUMBER
MM25	600093C	12-19401
MM30	600093U	11-133291
MM35	600091U	11-128801

Copyright 1975 by McCulloch Corporation

LITHO IN U.S.A.

2 MINI-MAC - Vented Fuel Cap for Backfit.

Note that the unvented Fuel Cap, P/N 92183 CAN NOT be used with the earlier unvented fuel and oil tank assembly. Therefore, service replacement vented Fuel Cap, P/N 90922, will be furnished for backfitting the earlier unvented Fuel and Oil Tank Assembly, P/N 83899 or P/N 86441.

PRICING AND STOCKING INFORMATION

Subject	Part No.	Description	Manufacturer's Sug.List Price	Stocking Code
1.	91454	Kit - Fuel & Oil Tank Asy	$7.00	A
	91148	. Protector - Fuel vent	0.10	A
	91283	. Cap - Fuel tank	0.50	A

McCULLOCH CORPORATION

Product Service
Department